

INSTALLATION INSTRUCTIONS:

REPLACING A LOST OR DAMAGED PART:

- 1. Refer to UT-X-T exploded view shown below and identify item number of lost or damaged part(s).
- 2. Select appropriate part from UT-X-T-KIT1 Hardware Contents and replace accordingly.
- 3. Once replaced, adjust side hold downs and front/rear fences as needed according to the set-up instructions outlined in the owner's manual supplied with this kit.

CONVERSION OF A UT-X OR UT-X-SD TO A UT-X-T:

- 1. Remove all side hold downs and front/rear fences from the current product.


NOTE: In the case of the UT-X, the front fences are not removable and may be retained for the conversion to a UT-X-T.

- 2. Referring to the exploded UT-X-T view shown below, choose the appropriate parts from the UT-X-T-KIT1 and re-assemble all side hold downs and front/rear fences.

NOTE: When converting a UT-X-SD to a UT-X-T, the front fences should be replaced with Items #2 & #4 from the UT-X-T-KIT1 and secured using Items #9 & #10.

- 3. Once replaced, adjust side hold downs and front/rear fences as needed according to the set-up instructions outlined in the owner's manual supplied with this kit.


NOTE: Retain all unused hardware for future use.

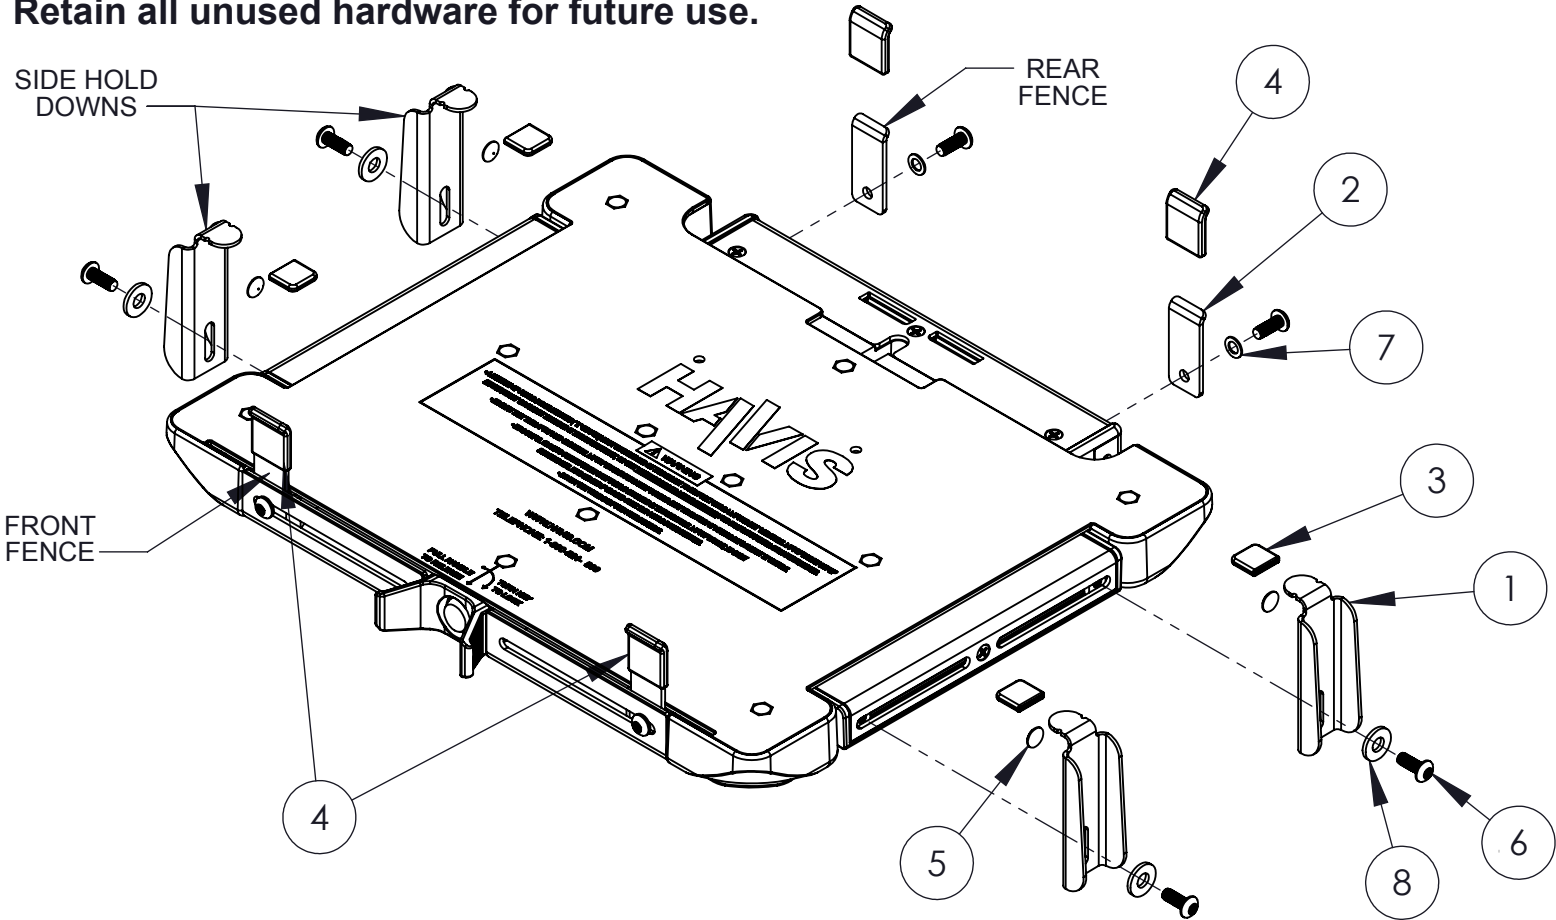

DRAWING NUMBER:
UT-X-T-KIT1_INST

WARNING: ALL HAVIS INC. PRODUCTS ARE DESIGNED WITH SAFETY OF USE AND INSTALLATION IN MIND. HOWEVER, IT IS THE SOLE RESPONSIBILITY OF THE OWNER/OPERATOR OF A VEHICLE USING HAVIS INC. MOUNTING AND DOCKING EQUIPMENT, TO INSURE THAT THE EQUIPMENT IS INSTALLED SO THAT IT WILL NOT INTERFERE WITH VEHICLE OPERATION, INTERFERE WITH SAFETY DEVICES, OBSTRUCT VIEW OF DRIVING CONDITIONS, OR IN ANY WAY DEGRADE OCCUPANT SAFETY. IMPROPER INSTALLATION CAN CAUSE SERIOUS INJURY IN THE EVENT OF AN ACCIDENT. INSTALLATION SHOULD ONLY BE PERFORMED BY QUALIFIED PROFESSIONALS. COMPUTERS AND MOTION DEVICES MUST BE MOVED TO AND STOWED/SECURED IN THEIR SAFE DRIVING POSITIONS BEFORE OPERATING VEHICLE.

UT-X-T-KIT1 HARDWARE CONTENTS			
REPLACEMENT PARTS			
ITEM NO.	DESCRIPTION	HAVIS PART NUMBER	QTY.
1	HOLD DOWN LUG, EXTRA LARGE	UT-0070-SM	4
2	BRACKET, FRONT AND REAR FENCE	UT-0023-SM	4
3	CAP, VINYL, BLACK, 0.45" X 0.5"	HW-CA-0001/GSM41120	4
4	CAP, VINYL, BLACK, 0.69" X 0.875"	HW-CA-0002/GSM41121	4
5	BUMPER, HOLD DOWN LUG	HW-RB-3608/GSM21101	4
6	SCREW, BUTTON HEAD, T25 PIN-IN-TORX, #10-32 X 0.5" LONG	HW-BH-0079/GSM33330	6
7	WASHER, BELLEVILLE, SERRATED, #10 SCREW SIZE	HW-SW-1262/GSM31089	2
8	WASHER, FLAT, #12 SCREW SIZE	HW-SW-1202/GSM31004	4
9	NUT, HEX LOCK, NYLON INSERT, #10-32	HW-NN-0902/GSM30015	2
10	WASHER, FLAT, 1/4" SCREW SIZE	HW-SW-1206/GSM31085	2
TOOLS			
11	TAMPER-RESISTANT T25 PIN-IN-TORX KEY	HW-AW-0006/GSM50261	1

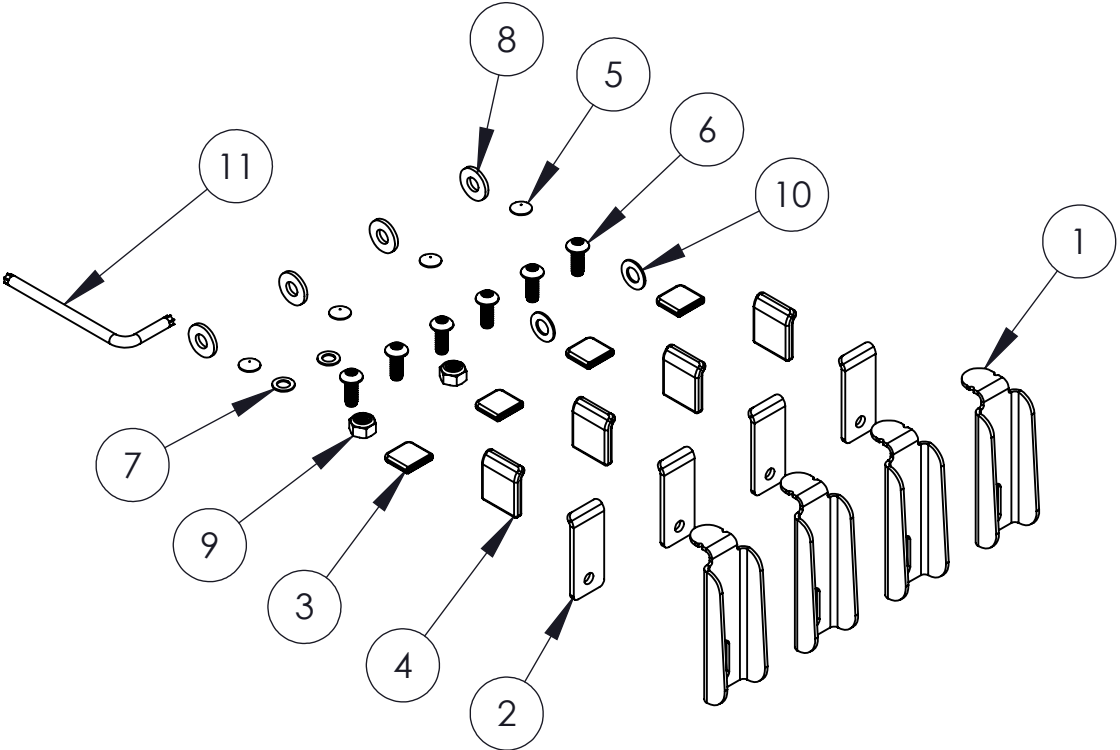

PRODUCT I.D.	DATE
UT-X-T-KIT1	03-18-11
PRODUCT NAME	
UT-X-T REPLACEMENT KIT1	
 1-800-524-9900 WWW.HAVIS.COM	WEIGHT: (LBS)
	REV. DATE 03-25-11

PRODUCT DESCRIPTION

PARTS REPLACEMENT KIT FOR UT-X-T
UNIVERSAL TRAY
MAY ALSO BE USED TO CONVERT EXISTING
UT-X AND UT-X-SD INTO A UT-X-T